



- EXAMPLE: - MANUAL & AUTOMATIC OPERATION  
 - LOCAL AND REMOTE CONTROL  
 - CIPHERED RADIO TRANSCEIVER

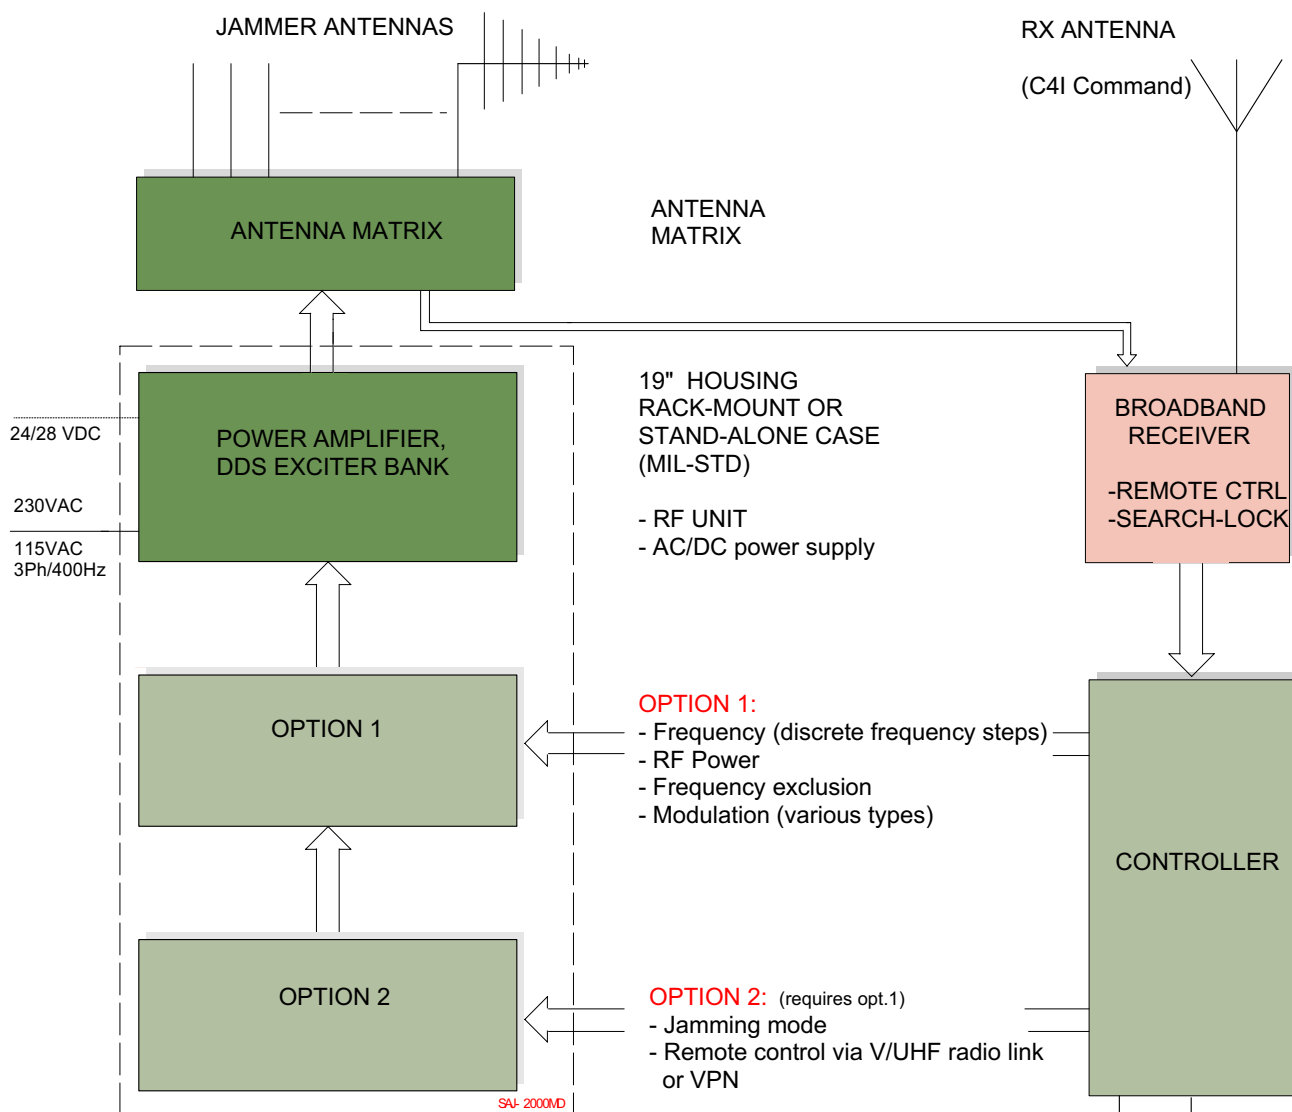

**FEATURES**

- FREQUENCY RANGE: 2 to 3000 MHz (0.1 - 14000 MHz)
- RF POWER: up to 500 W, selectable
- JAMMER OPERATIONAL MODE: - BARRAGE  
 - SPOT, HOPPING  
 - SWEPT  
 - SWEEP-LOCK  
 - LOOK-THROUGH  
 - MAN./AUTOMATIC  
 - VOICE/DATA COMMUNICATION
- TYPE OF MODULATION: - AM, FM, NOISE  
 - SINE, TRIANGLE  
 - PULSE, CHIRP  
 - SPOOFING
- POWER SUPPLY: 24/28VDC, 115VAC/3Ph, 230VAC
- ENVIRONMENT: MIL-STD-810E

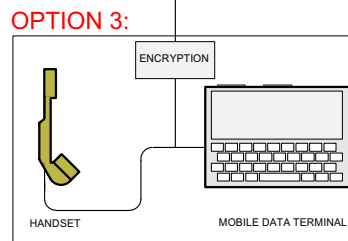

OPTION 3: COMMUNICATION CONSOLE FBT-126 WITH ENCRYPTION